



OUTDOOR LED SCREEN



HD
DISPLAY



HIGH
GRAYSCALE



QUICK
INSTALLATION




SUPER WIDE
VIEWING ANGLE




EASY
MAINTENANCE


PRODUCT IMAGES

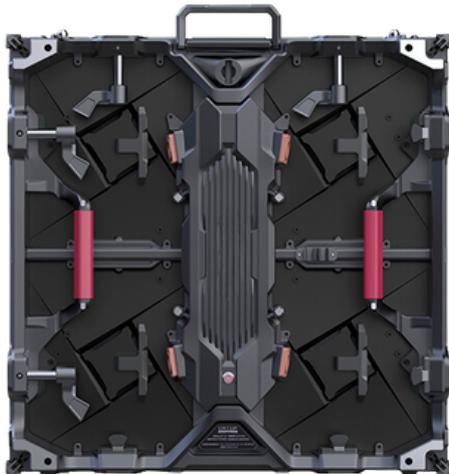

CABINET STRUCTURE

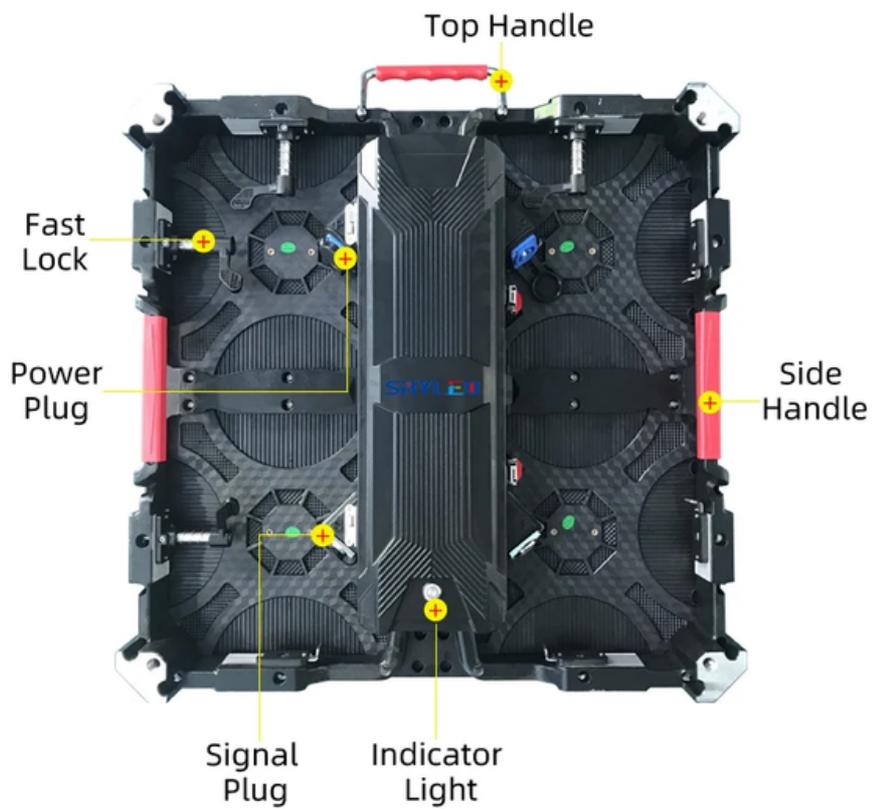


FAST INSTALLATION

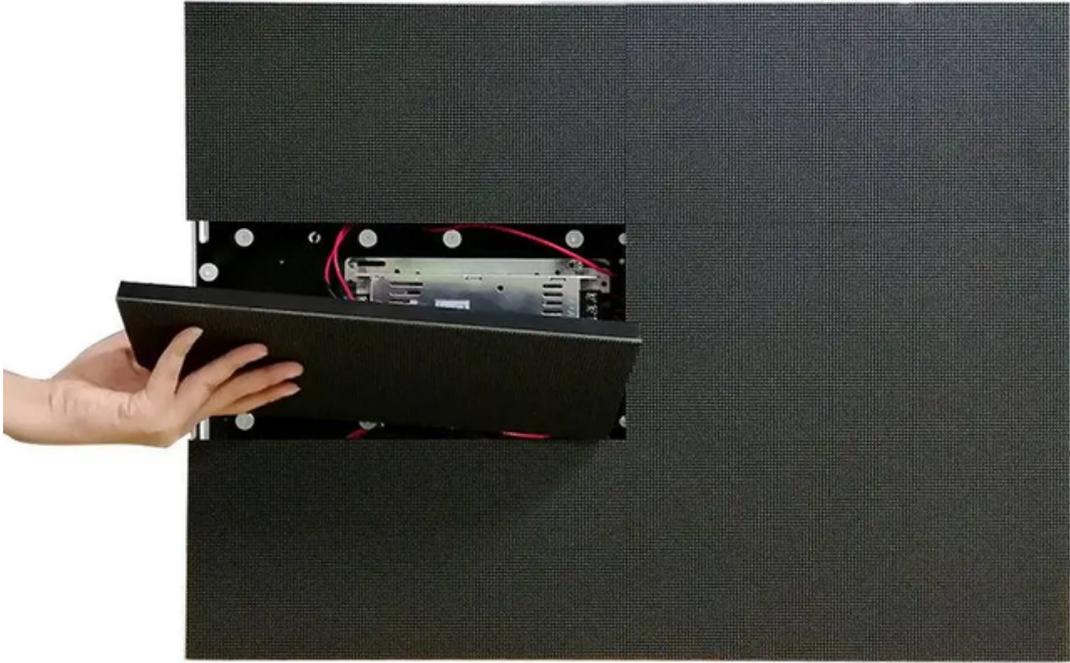


- One person could handle the installation easily.
- Extra rear handle design, independent power box.
- Fast locks could be easily locked and unlocked.
- Modular design, pin connection, corners protection

EASY MAINTENANCE

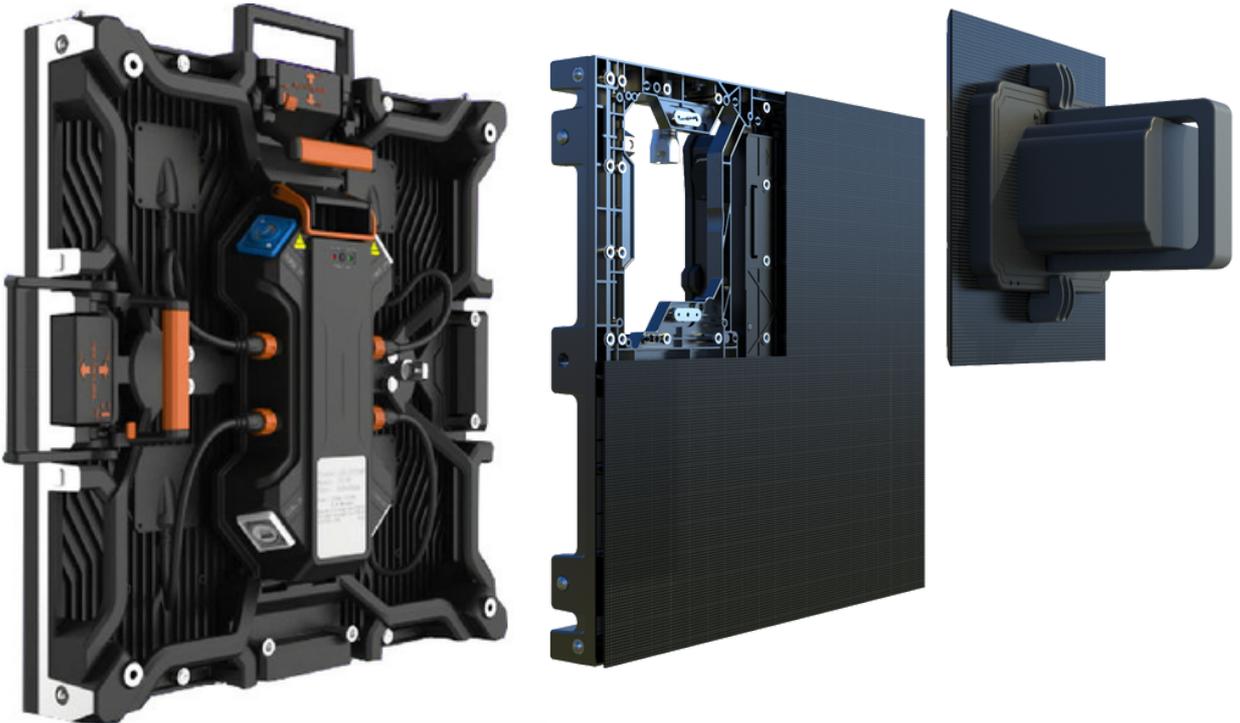

- Support both front and rear maintenance

OUTDOOR SERIES

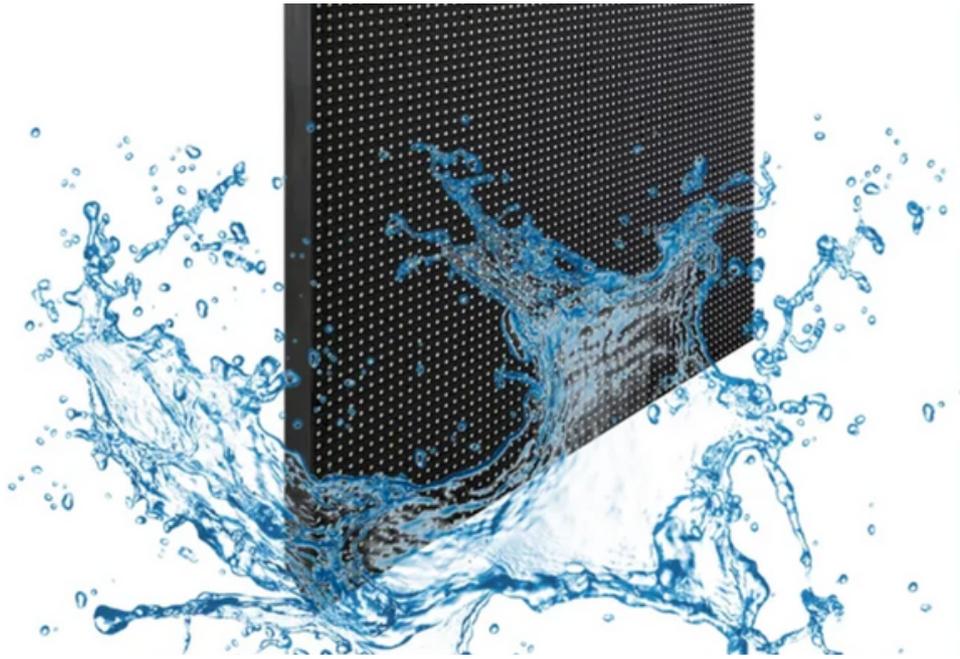

- High Protection
- Water Proof
- Good Heat Dissipation

OUTDOOR MODULE SERIES 320X160

Pixel pitch	3.91mm	6.25mm	7.81mm	10.41mm
Pixel Structure	3IN1 SMD	3IN1 SMD	3IN1 SMD	3IN1 SMD
Pixel Density	65410/m ²	25600/m ²	16394/m ²	9227/m ²
Module Resolution	128(W)*64(H)dots	80(W)*40(H)dots	64(W)X32(H) dots	48(W)X24(H) dots
Module Size(WXH)	320mm*160mm	320mm*160mm	320mm*160mm	320mm*160mm
White Balance Brightness	≥5000cd/m ²	≥5000cd/m ²	≥5000cd/m ²	≥5000cd/m ²
Color Temperature	2000K—12500K	2000K—12500K	2000K—12500K	2000K—12500K
Horizontal Viewing Angle	≥160°	≥160°	≥160°	≥160°
Vertical Viewing Angle	≥140°	≥140°	≥140°	≥140°
Optimal Viewing Distance	≥4meters	≥6meters	≥8meters	≥10meters
Contrast	≥5000:1	≥5000:1	≥5000:1	≥5000:1
Grayscale	12-14Bit	12-14Bit	12-14Bit	12-14Bit
Refresh Rate	≥3840HZ	≥3840HZ	≥3840HZ	≥3840HZ
Continuous Working Time	≥72H	≥72H	≥72H	≥72H
Life Span	100,000H	100,000H	100,000H	100,000H
Protection Class	IP65	IP65	IP65	IP65
Operating Voltage	DC 4.2-5V	DC 4.2-5V	DC 4.2-5V	DC 4.2-5V
Maximum Power Consumption	850W/m ²	850W/m ²	850W/m ²	850W/m ²
Average Power Consumption	350W/m ²	350W/m ²	350W/m ²	350W/m ²